

TYPE C 连接器系列 TYPE C CONNECTOR SERIES

◆ TYPE C 连接器系列主要技术特性 Specification of TYPE C Connector Series




额定负荷 Rated Load	5A Max.for VBUS&GND; 0.5A for other pins	温度范围 Temperature	-30~+85℃
接触电阻 Contact Resistance	≤ 40mΩ	电器寿命 Life	≥ 1000 次
耐 压 Withstand Voltage	100V AC(RMS)	插入力 Insertion force	5~20N
绝缘电阻 Insulation Resistance	≥ 100MΩ	插出力 Extraction force	8~20N

115




TYPE C CONNECTOR SERIES
TYPE C 连接器系列






USB3.1-111-PC05R-01

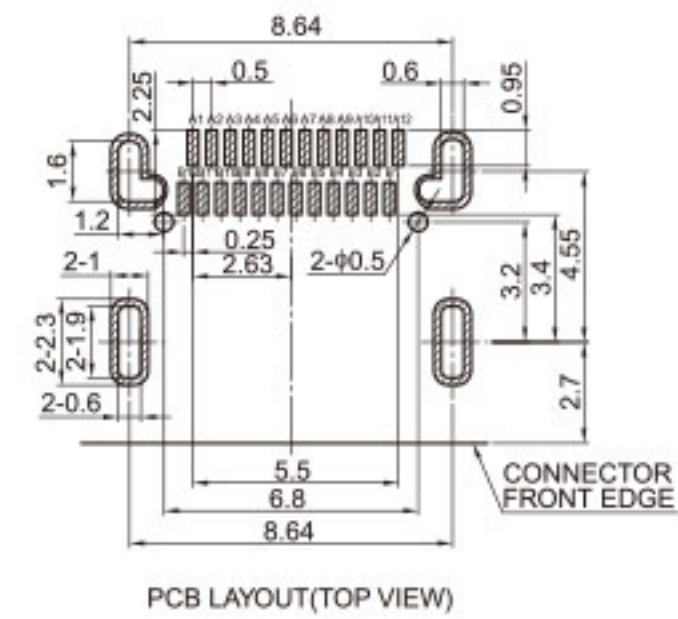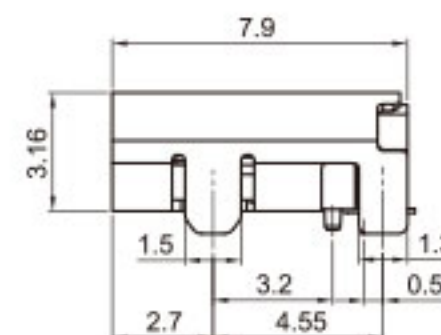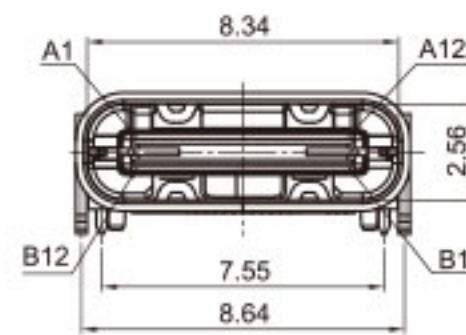




USB3.1-111-PC06R-01

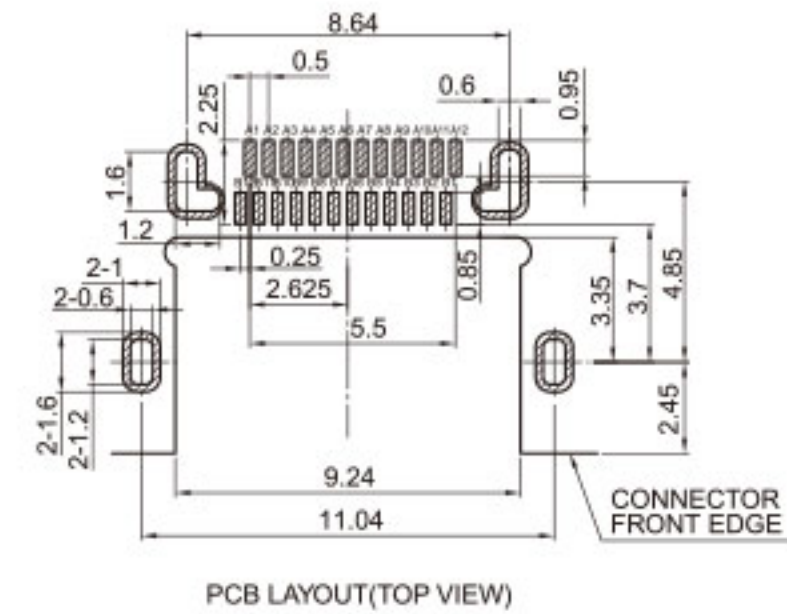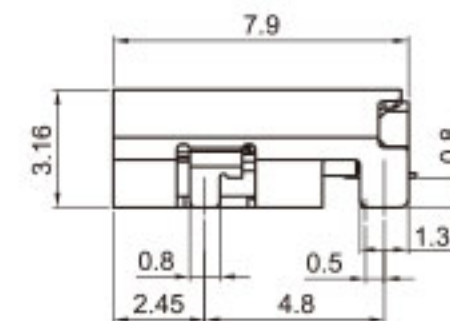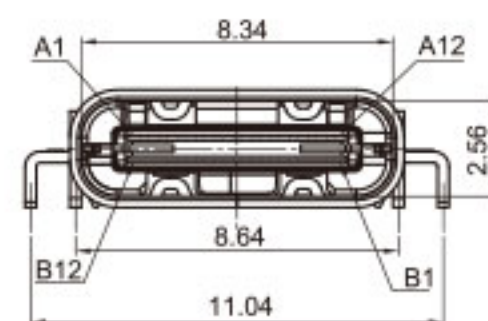

TPC-001

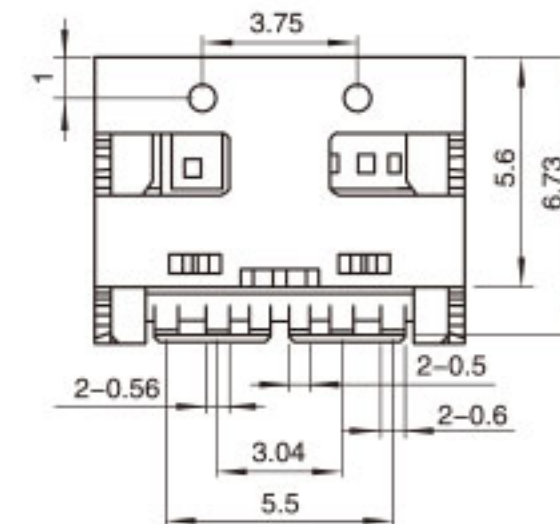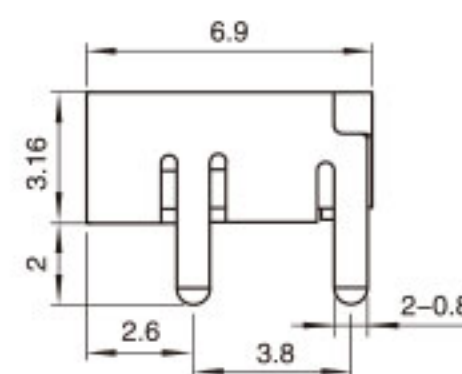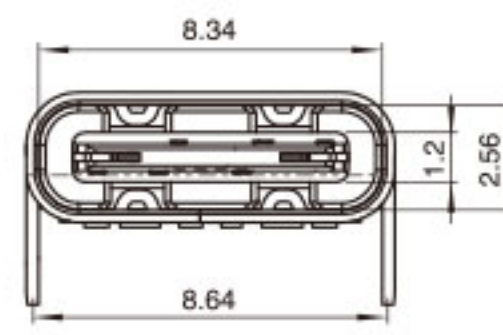

USB-115-PC17R-01

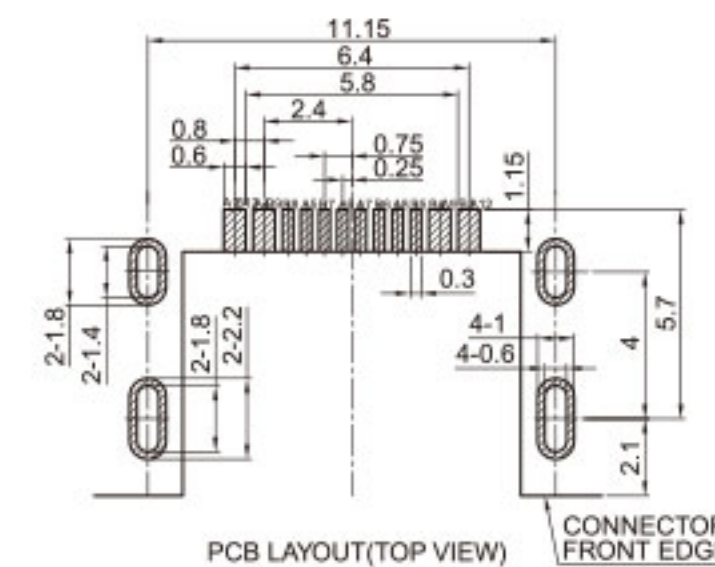
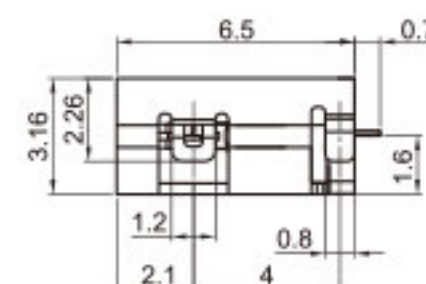
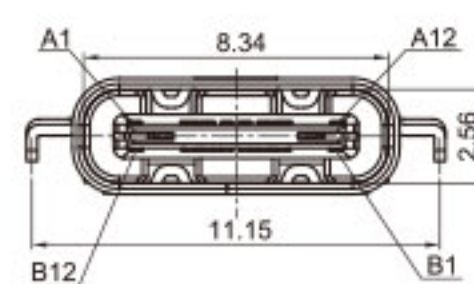


TYPE C 连接器系列




TYPE C CONNECTOR SERIES






USB-115-PC20R-01

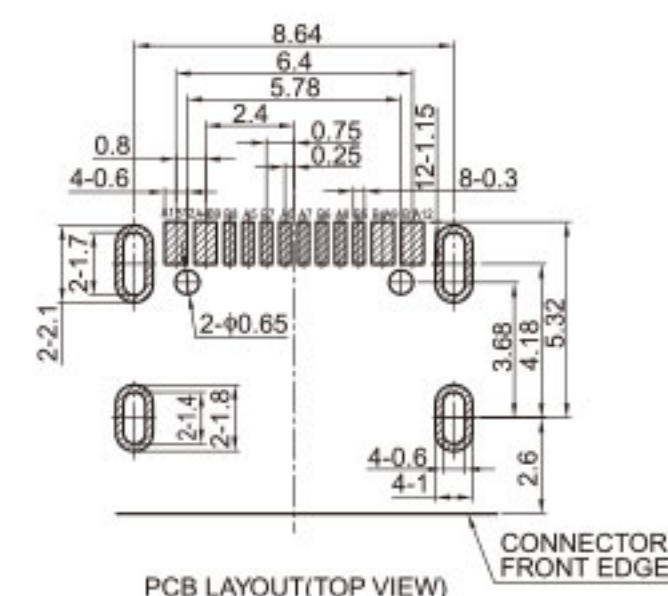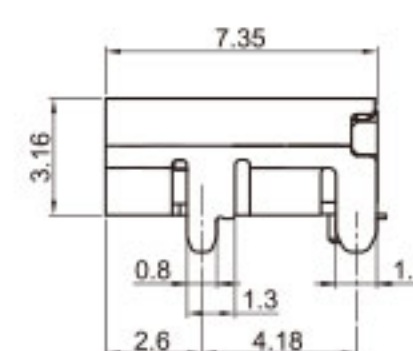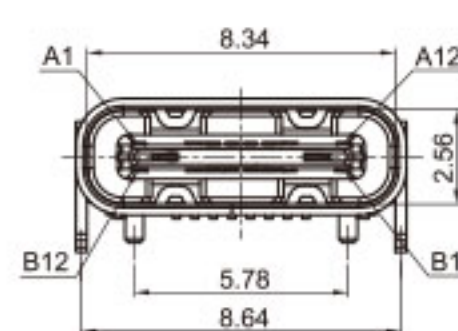




USB3.1-111-PC21R-01

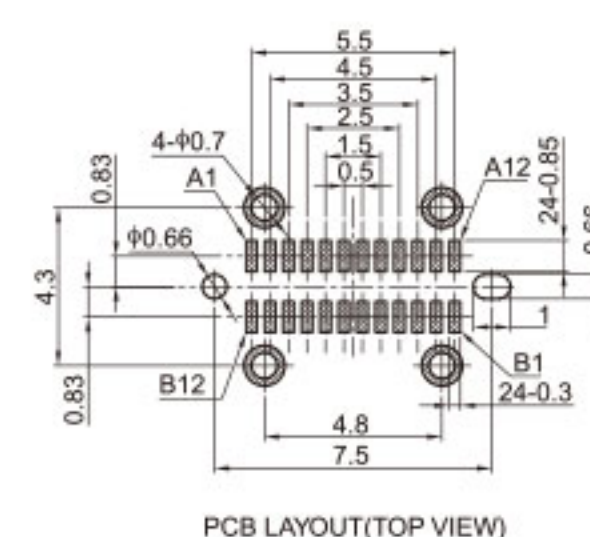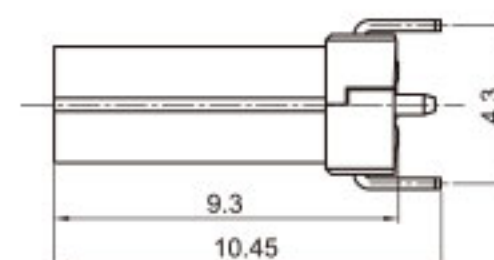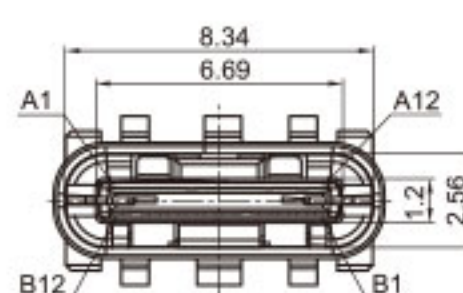




TYPE-C 6Pin 直插件

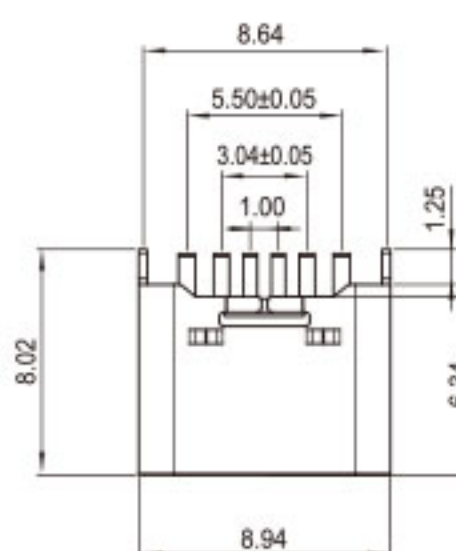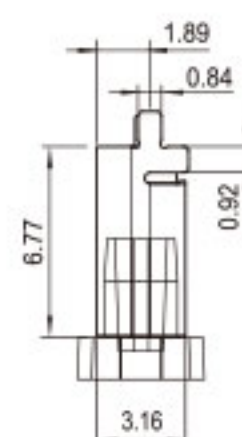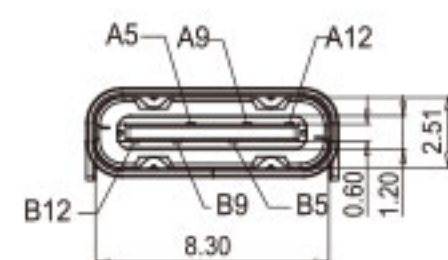

TYPE-C 6Pin 立贴 2脚

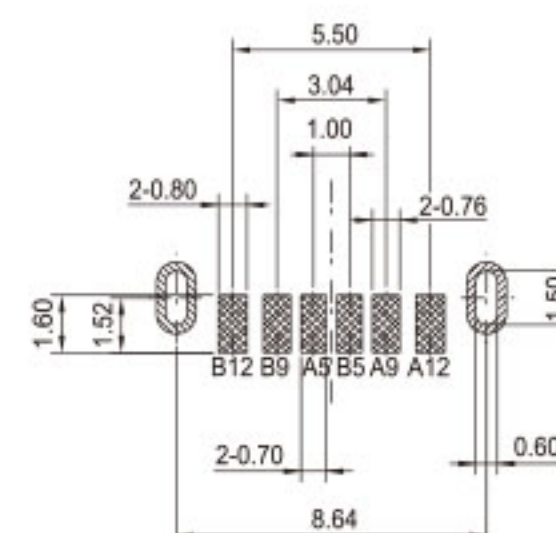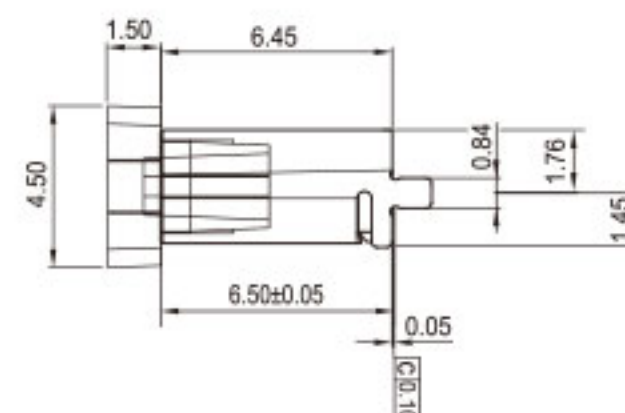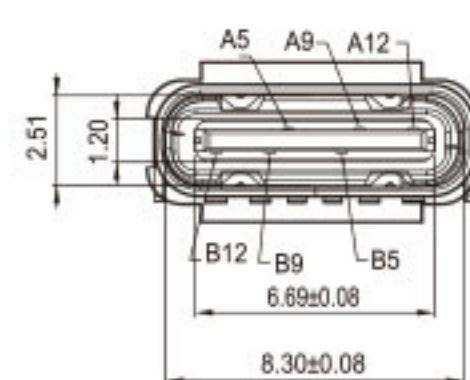

TYPE-C 6Pin 立贴 4脚

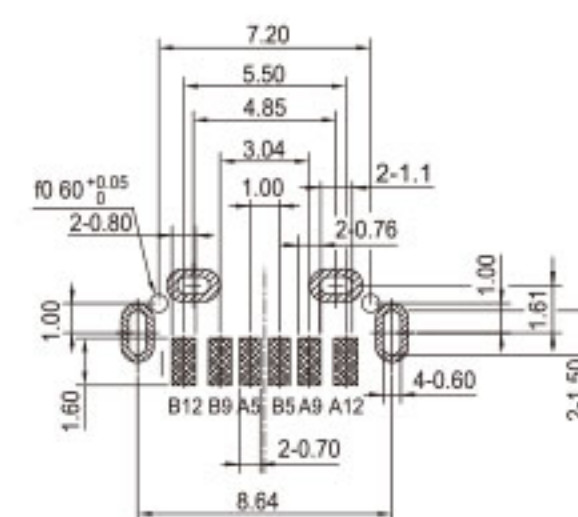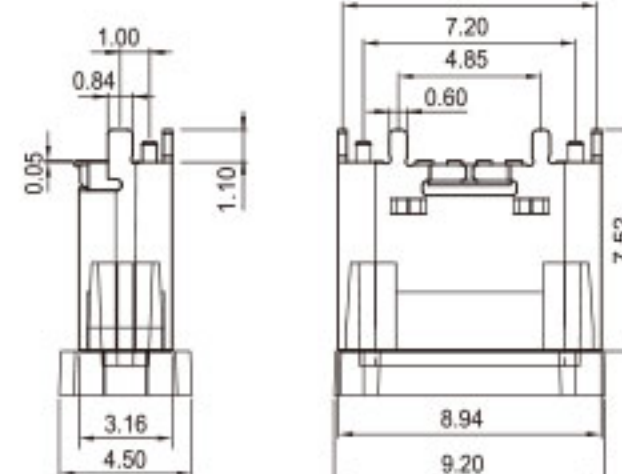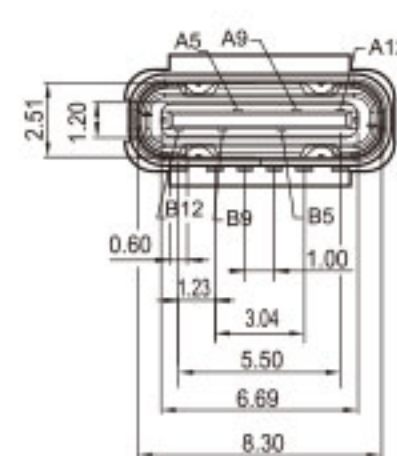





2032.1.1, 8:45

TYPE C 连接器系列


TYPE C CONNECTOR SERIES

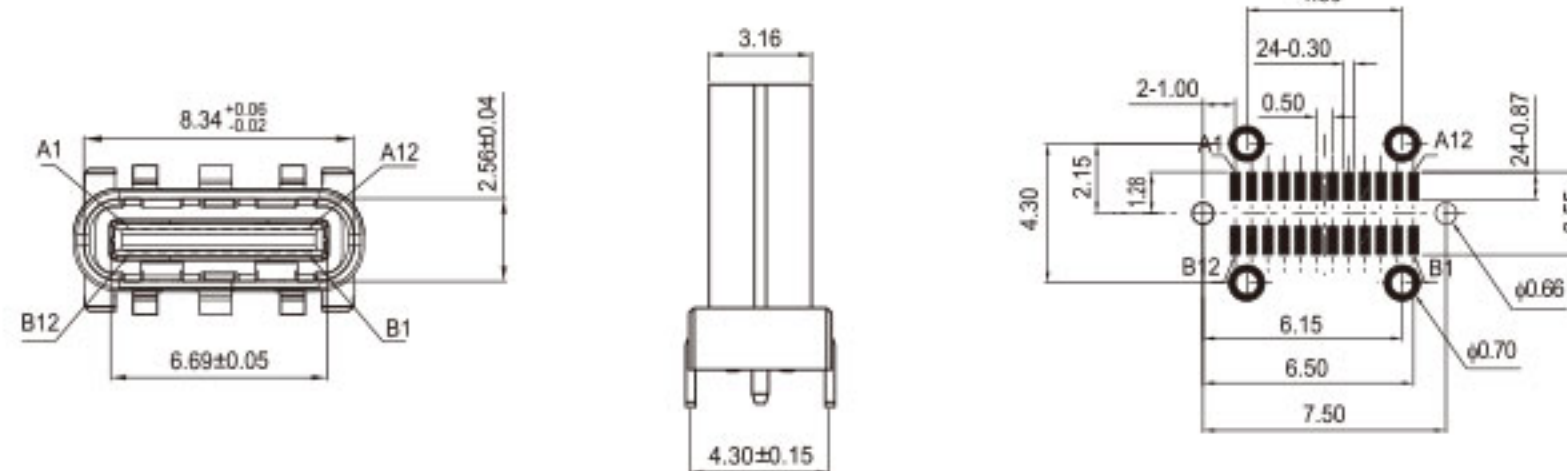


TYPE-C 24Pin 立贴小脚

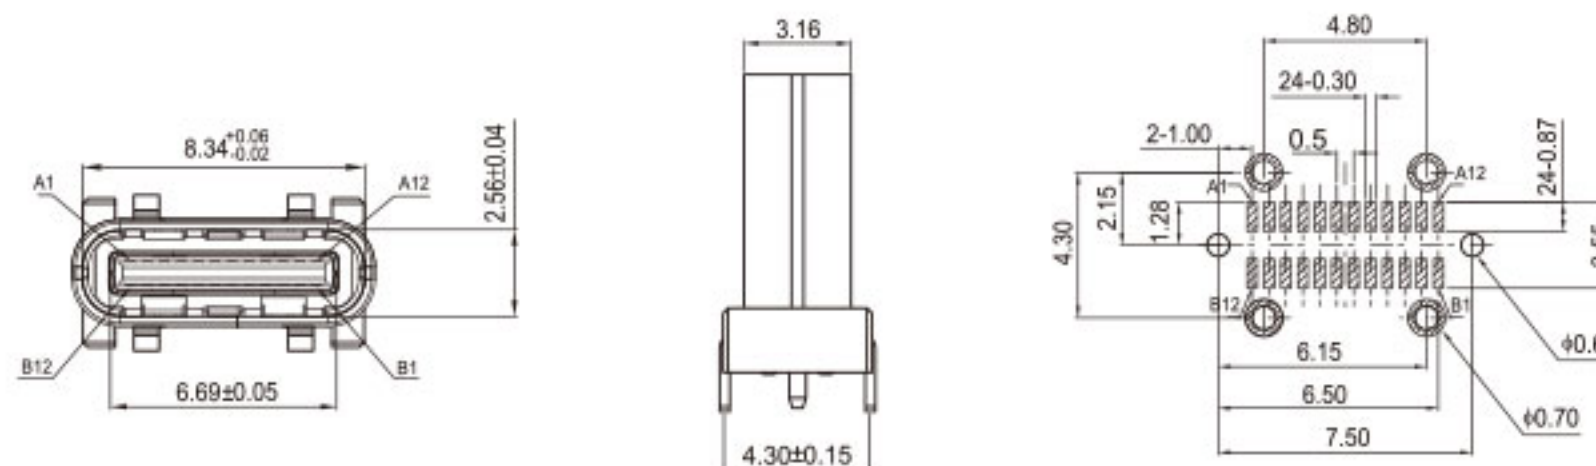


TYPE-C 24Pin 立贴母座

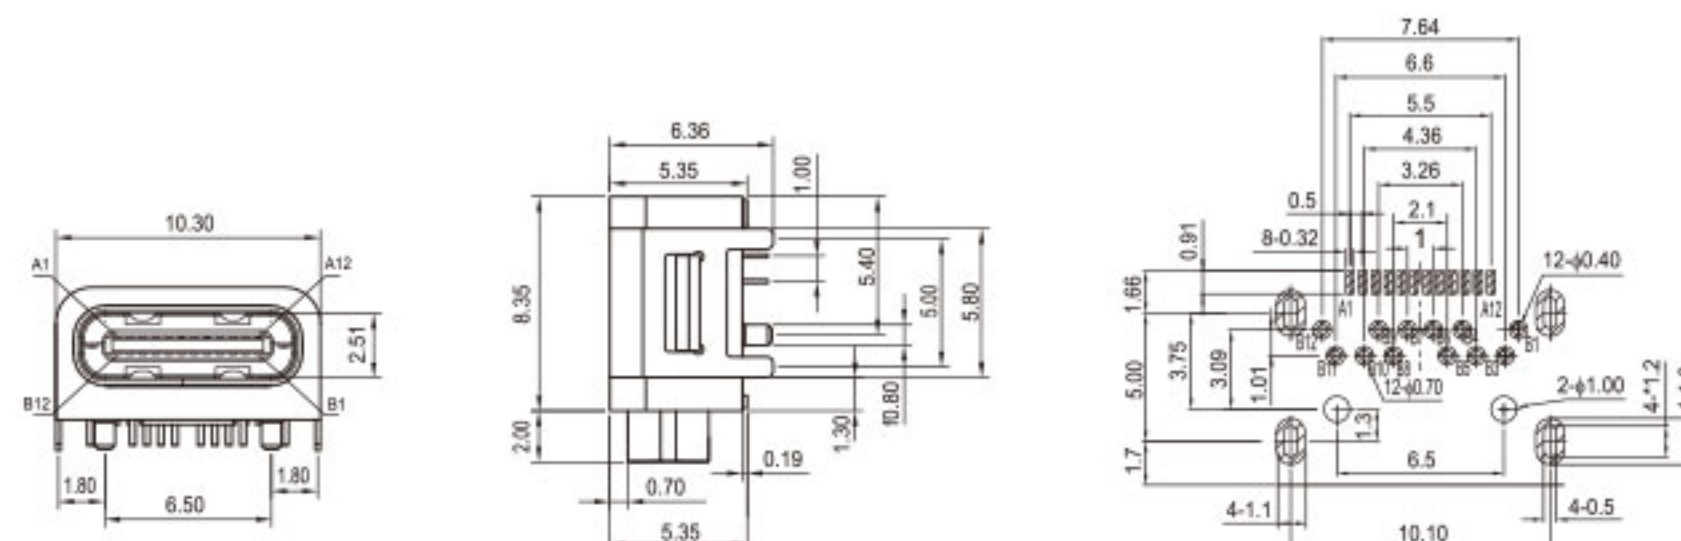

TYPE-C 24Pin 前插

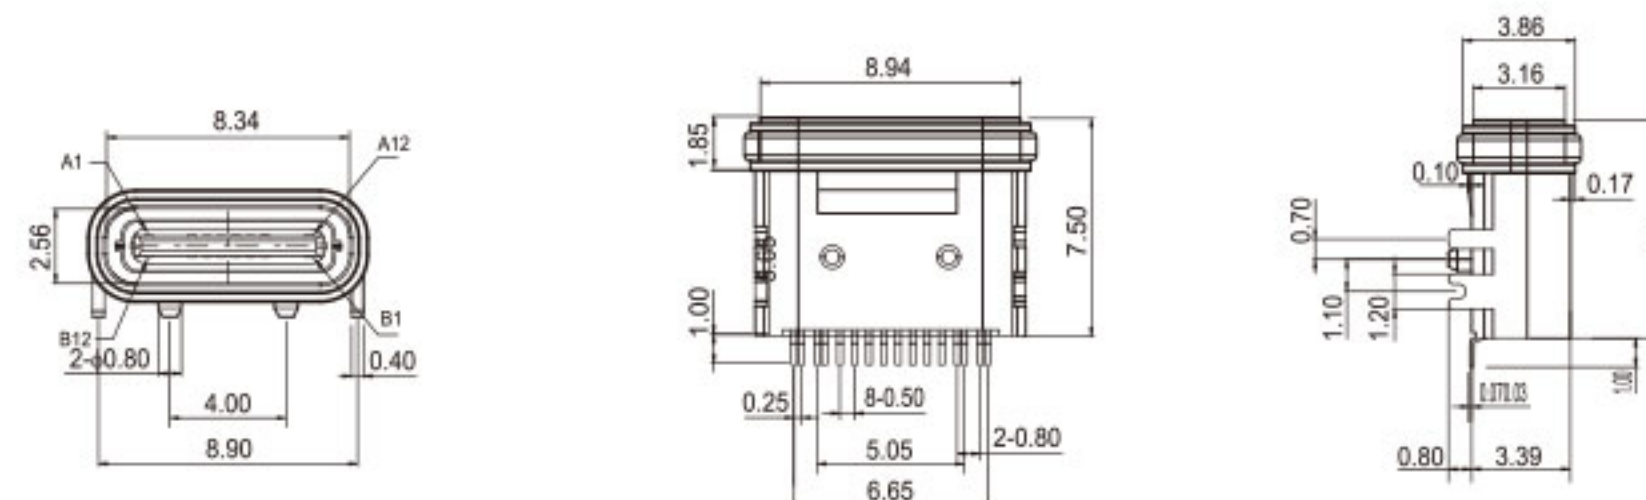

TYPE-C 16Pin 压铸

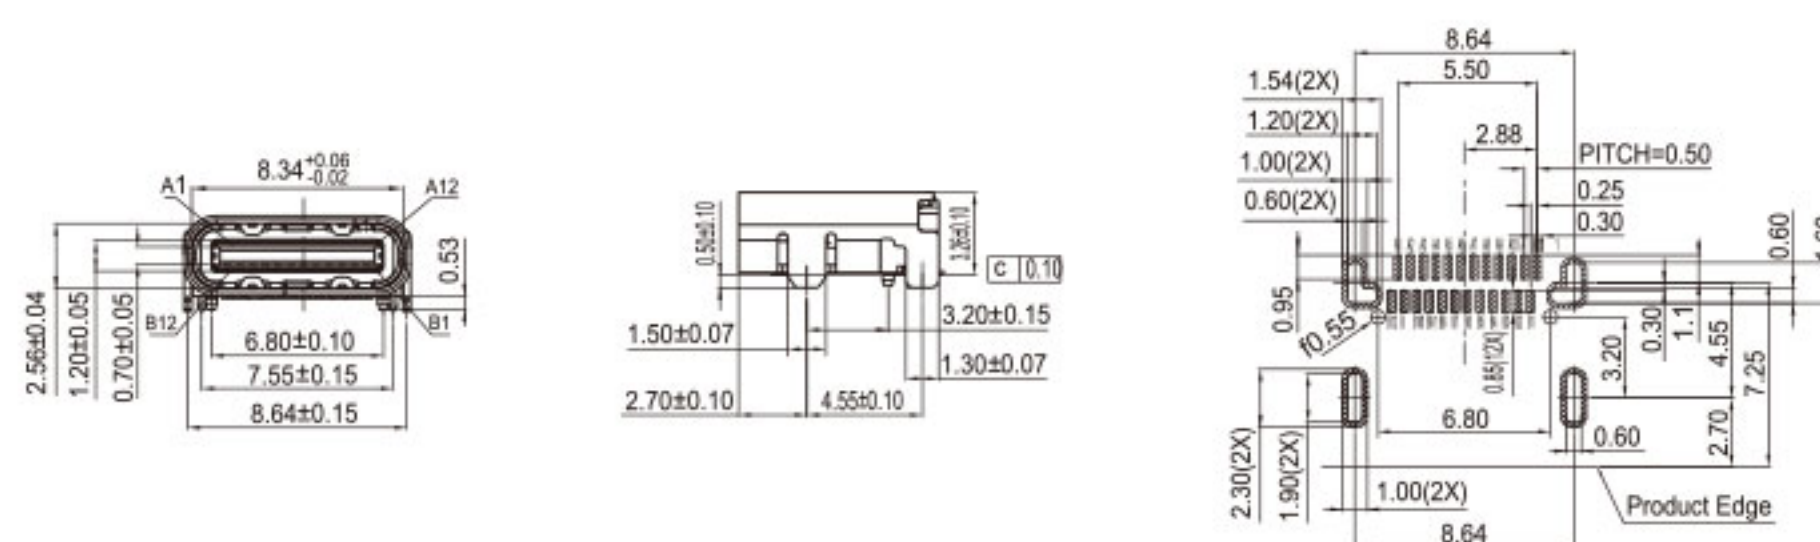

TYPE-C 24Pin 双排